

Name: \_\_\_\_\_ Index No: \_\_\_\_\_ / \_\_\_\_\_

2705/103      2709/103

2707/103      2710/103

**STRUCTURES I AND  
CONSTRUCTION MATERIALS**

Oct./Nov. 2014

Time: 3 hours



Candidate's Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**THE KENYA NATIONAL EXAMINATIONS COUNCIL**

**DIPLOMA IN BUILDING TECHNOLOGY  
DIPLOMA IN CIVIL ENGINEERING  
DIPLOMA IN ARCHITECTURE  
MODULE I**

**STRUCTURES I AND CONSTRUCTION MATERIALS**

**3 hours**

**INSTRUCTIONS TO CANDIDATES**

*Write your name and index number in the spaces provided above.*

*Sign and write the date of the examination in the spaces provided above.*

*You should have a calculator for this examination.*

*This paper consists of EIGHT questions in TWO sections; A and B.*

*Answer FIVE questions choosing TWO questions from section A, TWO questions from section B and ONE question from either section A or B in the spaces provided in this question paper.*

*All questions carry equal marks.*

*Maximum marks for each part of a question are indicated.*

*Candidates should answer the questions in English.*

**For Examiner's Use Only**

Section	Question	Maximum Marks	Candidate's Score
A	1	20	
	2	20	
	3	20	
	4	20	
B	5	20	
	6	20	
	7	20	
	8	20	
TOTAL SCORE			

**This paper consists of 20 printed pages.**

**Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.**

## SECTION A: STRUCTURES

Answer at least **TWO** questions in this section.

1. (a) Differentiate between the following terms:
- (i) modulus of elasticity and bulk modulus;
  - (ii) modular ratio and Poisson's ratio.
- (4 marks)
- (b) (i) Sketch and label a stress-strain graph for typical results obtained from a test on a mild steel rod tested under tension to destruction.
- (ii) From the graph in (i), define **three** ranges of stress.
- ( $7\frac{1}{2}$  marks)
- (c) A mild steel specimen was tested under tension to destruction from which the following data was collected:
- |                                     |         |
|-------------------------------------|---------|
| Gauge length                        | 195 mm  |
| Original diameter                   | 18 mm   |
| Final length                        | 205 mm  |
| Diameter at fracture                | 16.5 mm |
| Extension at an early load of 48 kN | 0.05 mm |
| Yield load                          | 56 kN   |
| Maximum load                        | 190 kN  |
- Determine:
- (i) modulus of elasticity for the material;
  - (ii) yield stress;
  - (iii) ultimate stress;
  - (iv) percentage elongation;
  - (v) percentage area reduction;
  - (vi) working stress with a factor of safety of 1.75 applied on maximum stress.
- ( $8\frac{1}{2}$  marks)

2. (a) (i) Derive the temperature stress equation and state its main limitation.
- (ii) A hollow circular copper section of external diameter 225 mm and thickness 4 mm is to be used as a strut. It is initially subjected to a pre-compressive force of 175 kN axially. Determine the stress and hence the thrust against the supports at the ends if it undergoes a change in temperature from 20°C to 125°C. Take the coefficient of thermal expansion for the material as  $11 \times 10^{-6}$  per °C and  $E = 105 \text{ kN/mm}^2$
- (11 marks)

(b) For the section shown in figure 1, determine:

- (i)  $I_{yy}$
- (ii)  $r_{yy}^2$
- (iii)  $Z_{yy}$

(9 marks)

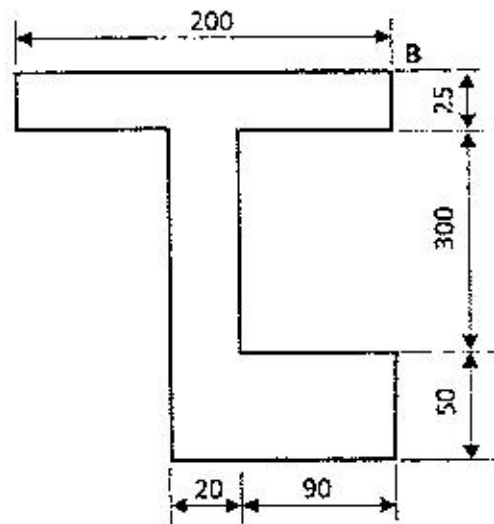


Fig. 1

3. (a) Analyse the beam shown in figure 2 for reactions, shear forces, bending moments and hence sketch the shear forces, bending moments diagrams indicating all the critical values. (10 marks)
- (b) (i) Illustrate two end fixity conditions for columns showing how effective lengths are determined in each case.
- (ii) Define the term 'slenderness ratio'.
- (iii) Using Rankine's formula determine the critical buckling load for a 4 m long column of equilateral triangular hollow section of side 120 mm and 5 mm thickness. One end of the column is held in position and direction while the other end is only held in position but not in direction.
- Take  $a = \frac{1}{6500}$

Actual height = 2.5 m

Yield stress = 115 N/mm<sup>2</sup>

(10 marks)

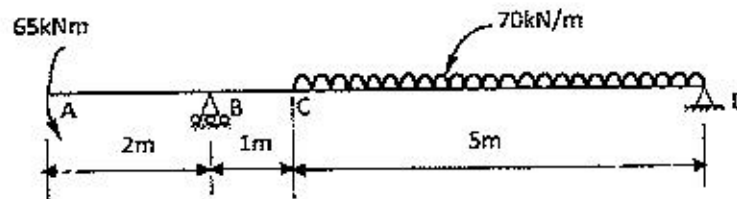


Fig. 2

4. (a) (i) Define the term 'bending stress'.
- (ii) Determine the value of the maximum bending stress and the radius of curvature at the point of maximum bending moment for a rectangular cantilever beam of width 120 mm, depth 400 mm and span 2.6 m. The beam carries a uniformly distributed load (UDL) of 30 kN/m together with a point load of 75 kN at the free end. Take  $E = 185 \text{ kN/mm}^2$
- (b) Using the method of joint resolution, determine the magnitude and nature of forces for all the members of the frame shown in figure 3. (13  $\frac{1}{2}$  marks)

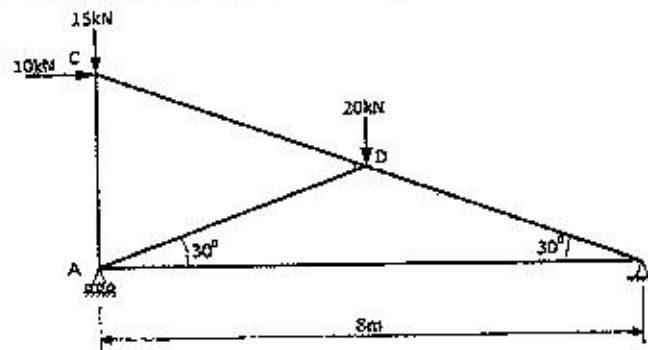


Fig. 3

2705/103      2709/103  
2707/103      2710/103

## SECTION B: CONSTRUCTION MATERIALS

*Answer at least TWO questions from this section.*

5. (a) Describe the glass manufacturing process. (8 marks)
- (b) Outline six types of glass, stating their uses. (12 marks)
6. (a) Explain the manufacturing process of bricks. (15 marks)
- (b) Describe the water absorption test on bricks. (5 marks)
7. (a) Describe the following types of paints:
- (i) distemper;
  - (ii) emulsions;
  - (iii) oil paint.
- (6 marks)
- (b) Explain the following paint defects, stating how they can be eliminated:
- (i) blistering;
  - (ii) bitterness;
  - (iii) chalking;
  - (iv) cissing.
- (10 marks)
- (c) (i) Describe bitumen;
- (ii) State two properties of bitumen. (4 marks)
8. (a) With reference to iron ores, distinguish between magnetite and haematite. (4 marks)
- (b) Explain annealing as a heat treatment process for metals. (4 marks)
- (c) Describe the following timber defects:-
- (i) knots;
  - (ii) burl;
  - (iii) shake;
  - (iv) pitch.
- (6 marks)
- (d) Explain the production of pozzolanic portland cement by the dry process. (6 marks)

2705/103  
2707/103

2709/103  
2710/103